

Dyna-Star® HP or HF Pump Low Level Indicator Kit; Dip Stick Kit

332515B

EN

Provides a visual reference of remaining fluid level in a tank / reservoir used with the Dyna-Star HP or HF pump. Low Level Indicators equipped with a user supplied alarm will also provide an audible and/or visual notification of a low fluid level. For professional use only.

Low Level Indicator Part No: 77X522

Includes sight glass, electric low level switch and cable. Requires follower plate.

Dip Stick Part No: 77X530 - 90#; 77X531 - 60#

Cannot be used with a follower plate.



Important Safety Instructions

Read all warnings and instructions in this manual and in the Dyna-Star HP or HF Pump instruction manual. Save all instructions.



Part No. 77X522






Part No. 77X530 or 77X531

Installation

Warnings





See the Dyna-Star HP and HF Pump Instruction manual for additional warnings.

					
SKIN INJECTION HAZARD High-pressure fluid from dispense device, hose leaks, or ruptured components will pierce skin. This may look like just a cut, but it is a serious injury that can result in amputation. Get immediate surgical treatment. Follow Pressure Relief Procedure in this manual, when you stop dispensing and before cleaning, checking, or servicing equipment.					

Pressure Relief



Follow the Pressure Relief Procedure whenever you see this symbol.

					
This equipment stays pressurized until pressure is manually relieved. To help prevent serious injury from pressurized fluid, such as skin injection, splashing fluid and moving parts, follow the Pressure Relief Procedure when you stop dispensing and before cleaning, checking, or servicing the equipment.					

To relieve pressure in the system, use two wrenches working in opposite directions on pump outlet fitting to **slowly loosen fitting only** until fitting is loose and no more lubricant or air is leaking from fitting. See FIG. 1.

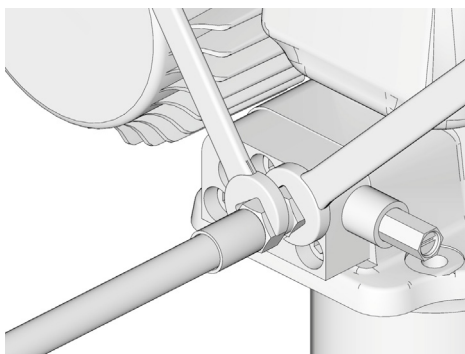


FIG. 1

Installing Low Level Indicator

1. Disconnect Dyna-Star pump from main power source.
2. If unit has already been in service, **relieve pressure** (see Pressure Relief procedure, page 2).
3. Fill reservoir with grease to raise follower plate (if installed) to an easily accessible level.

NOTE: Installing the follower plate will be easier if the reservoir has been filled with grease first.

4. Remove plug (a) from cover (b). Discard plug, you will not reuse it.

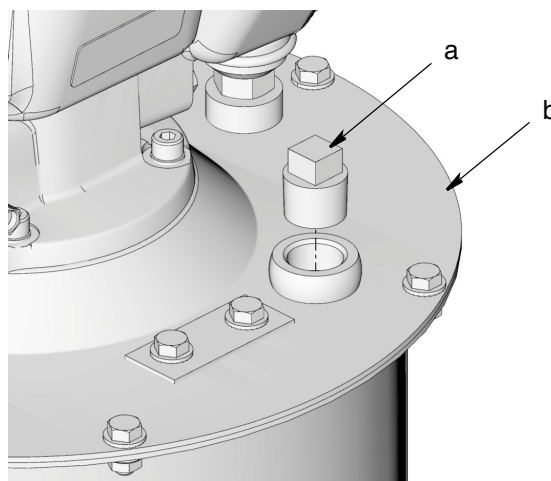


FIG. 2

5. Loosen bolts (c) and remove cover (d) from Dyna-Star pump (FIG. 3).

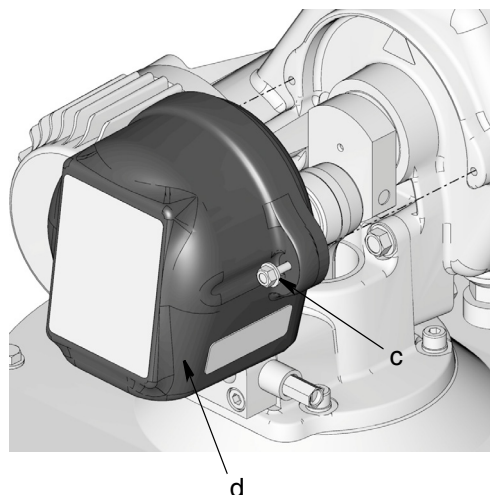


FIG. 3

6. Remove screws (e) and washers (f) holding Dyna-Star Pump to reservoir cover (b) and remove pump from cover (FIG. 4).

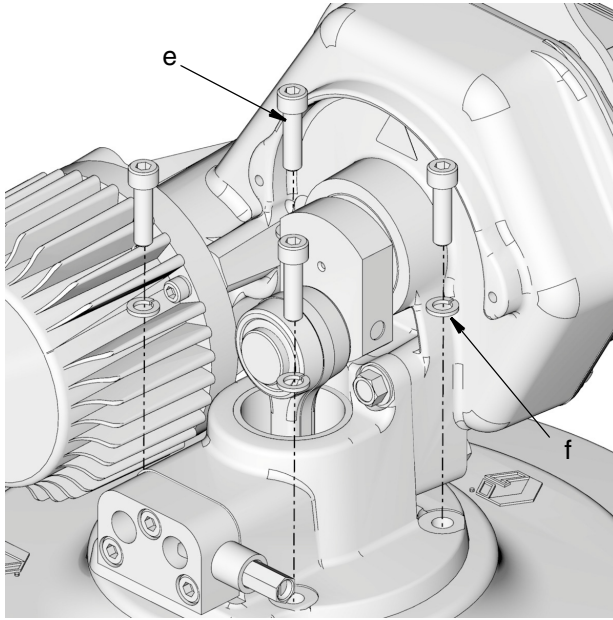


FIG. 4

7. Remove the screws (g) (holding the reservoir cover (b) to the reservoir (h)) (FIG. 5).

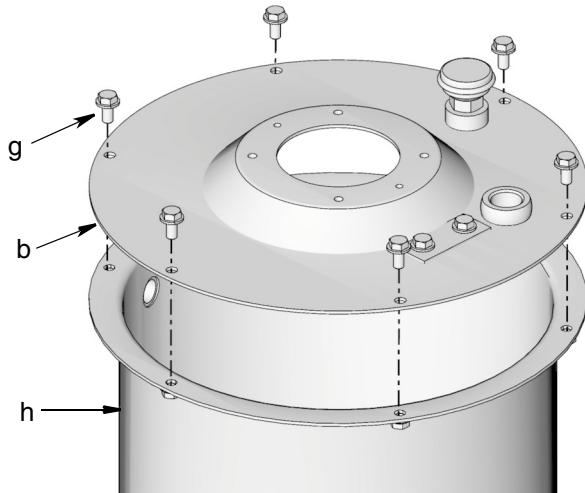


FIG. 5

8. (If previously installed) remove follower plate from inside reservoir.
9. Determine the correct cable length to use for your pump reservoir.
 - Short cable is used with 60# reservoirs.
 - Long cable is used with 90# reservoirs.

Remove and discard the cable you are not using and the **Notice** label attached to the cables.

NOTICE

Failure to use the correct cable length could result in inaccurate level indication and low level shutdown.

10. Feed the low level cable (j) through accessory hole (aa) (FIG. 6) in the reservoir cover (b). Wrench tighten low level in place.

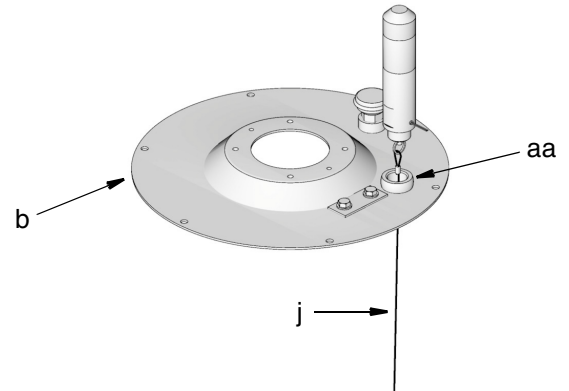


FIG. 6

11. Remove one of the screws (k) from the follower plate (m) (FIG. 7).
12. Install screw (k) through the hole (n) in the metal plate (p) located at the end of the low level cable (j) and then through the screw hole (r) in the follower plate (m) (FIG. 7). Tighten screw securely.

NOTE: Plate (p) is slightly bent. Be sure to install plate with the bent (curved) surface next to the follower plate so the plate will sit flat against the surface of the follower plate.

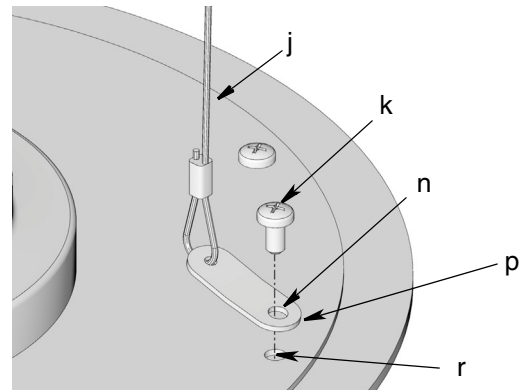


FIG. 7

13. Install follower plate (m) on top of grease inside reservoir (h) with the cone side facing up. Press follower plate firmly into grease to remove all air pockets.

14. Place reservoir cover (b) on top of reservoir (h).

NOTE: When reservoir cover (b) is correctly installed on reservoir (h), the low level cable (j) (installed between the low level indicator and follower plate (m)) will be aligned in a straight and vertical line as shown in FIG. 8.

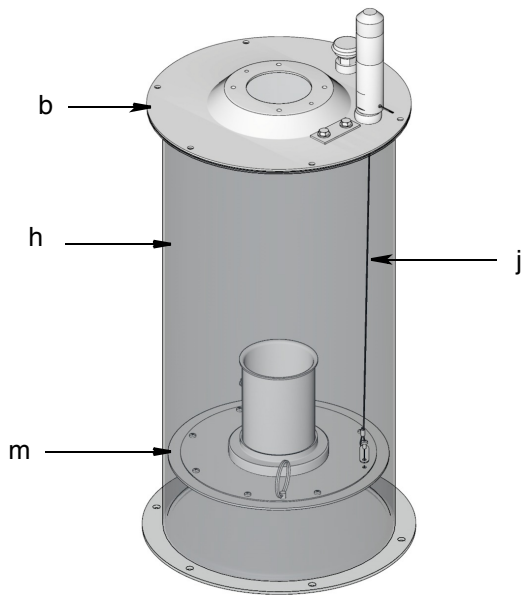


FIG. 8

15. Replace and tighten screws (g) securely (FIG. 9).

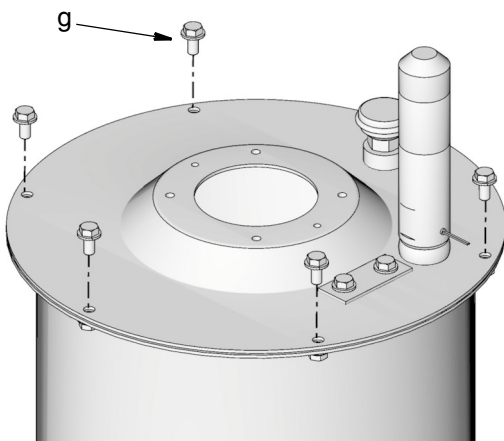


FIG. 9

16. Slide the pump down-tube through hole in the center of the reservoir cover (b) and hole in the center of the follower plate (m) as shown in FIG. 10.

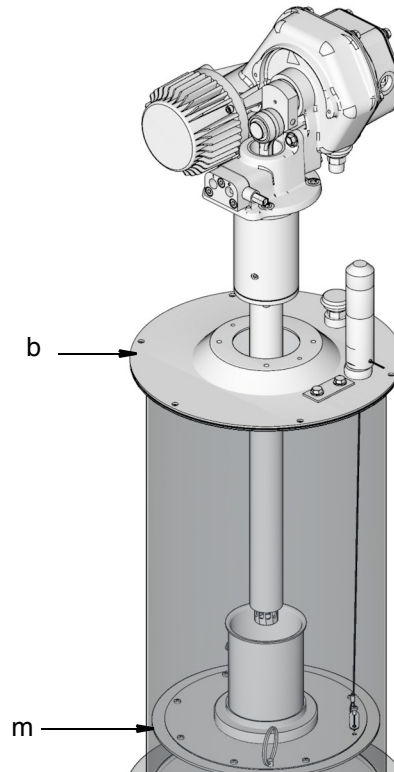


FIG. 10

NOTE: When the pump is correctly installed, the breather (t) will be below the control box (s) as shown in FIG. 11.

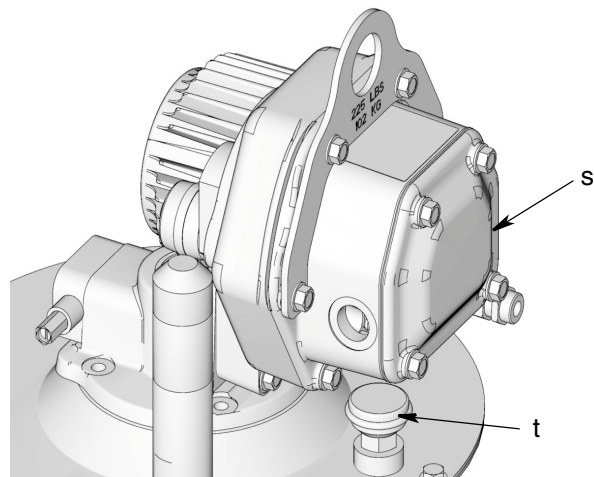


FIG. 11

17. Replace screws (e) and washers (f) and wrench tighten securely.

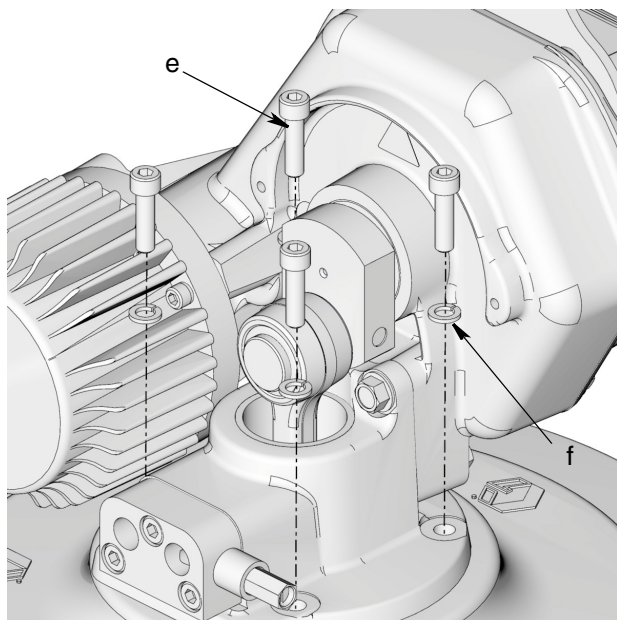


FIG. 12

18. Reinstall cover (d) using bolts (c). Use a wrench to tighten bolts securely.

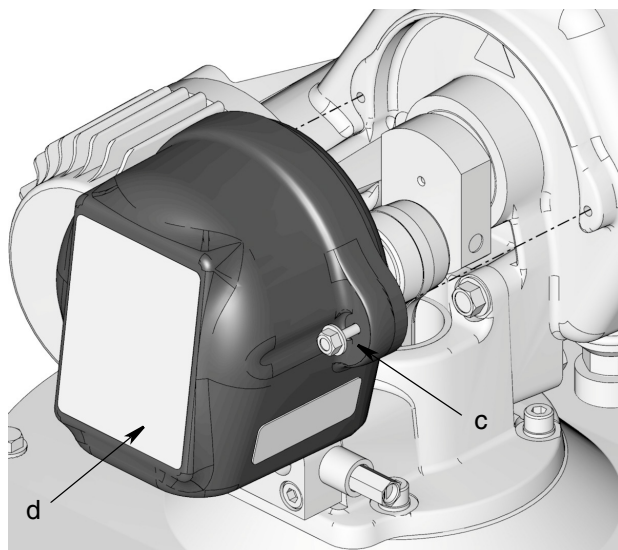


FIG. 13

External Alarm or Warning Light (Optional)

An external (user supplied) alarm or warning light can be added to the Low Level Indicator to provide an audible or visual signal in a low level situation.

NOTICE

To avoid premature failure and the loss of fluid/low level indication:

- Do not exceed the rating of the Low Level Sensor Switch by connecting excessive lights or audible signals.
- Level Sensor Switch is rated for a maximum of 32 VDC and 10 Watts. Maximum switch current is 0.4 AMPS.

1. Connect the lead wires (u) on the Low Level Indicator to the (user supplied) alarm device. See FIG. 14.

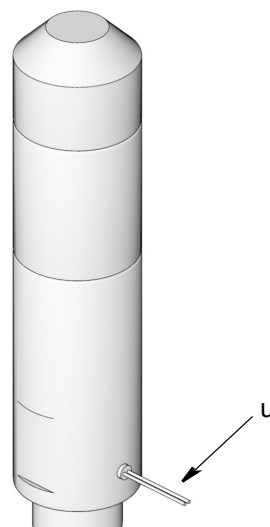


FIG. 14

2. Connect Dyna-Star pump to main power source.
3. Start system following pump start up procedure included in the Dyna-Star HP or HF Pump Manual provided with your system.

Low Level Visual Indication Sight Glass

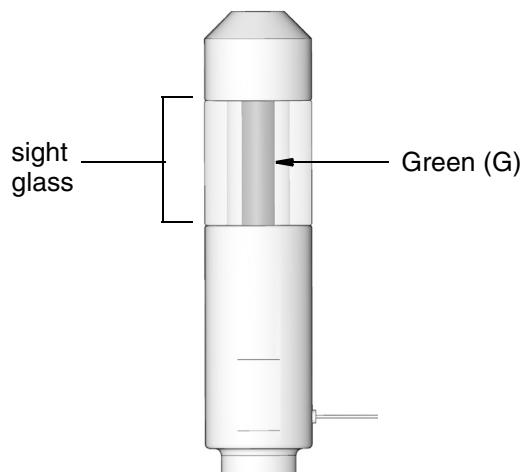


FIG. 15

Normal Level Mark (FIG. 15) - Red rod is completely covered by the green tube (G) and no red is visible in sight glass. This appearance indicates that the lubrication supply container has sufficient material. No additional lubricant needs to be added.

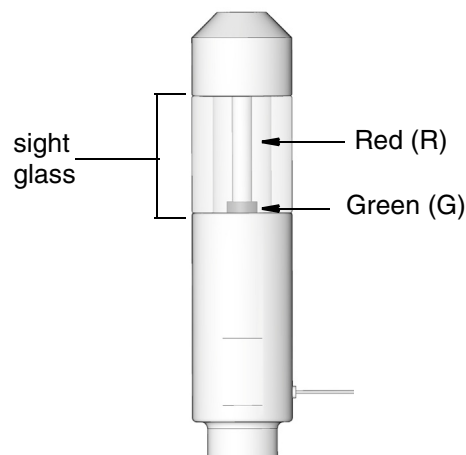


FIG. 17

Low Level Mark (FIG. 17) - Red rod (R) is completely visible with green tube (G) at lowest level. This appearance indicates that the main lubrication supply container is low and needs to be refilled.

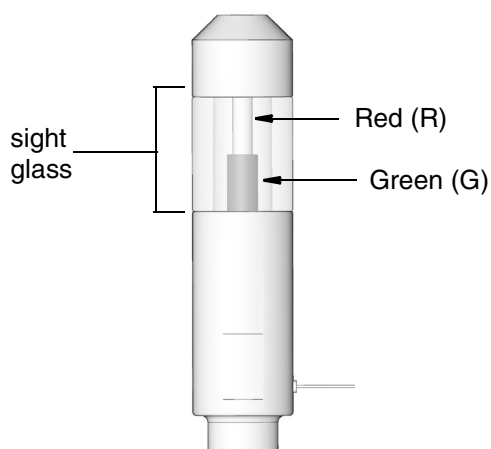


FIG. 16

Low Level Range (FIG. 16) - Red rod (R) is partially covered by the green tube (G). Some red is partially visible at the top of the sight glass. This appearance indicates that the lubrication supply container is approaching the low level mark and needs to be refilled.

For models equipped with a (user provided) external alarm, when the fluid has reached this low level mark, the sensor switch closes, activating the alarm.

Dip Stick Installation

1. Remove plug (a) from cover (b). Discard plug, you will not reuse it (FIG. 18).

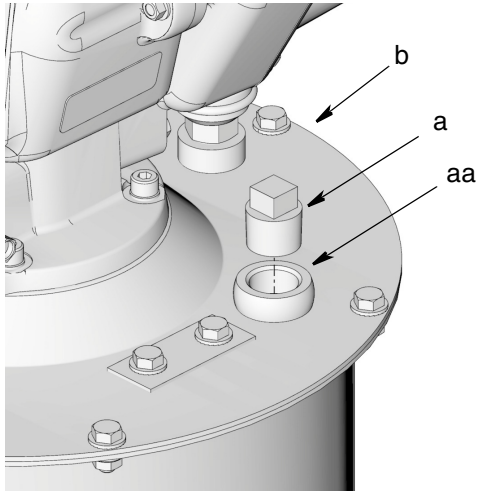


FIG. 18

2. Slide dipstick through hole (aa) in cover (b) and into reservoir (FIG. 18 and FIG. 19). Wrench tighten it in place.

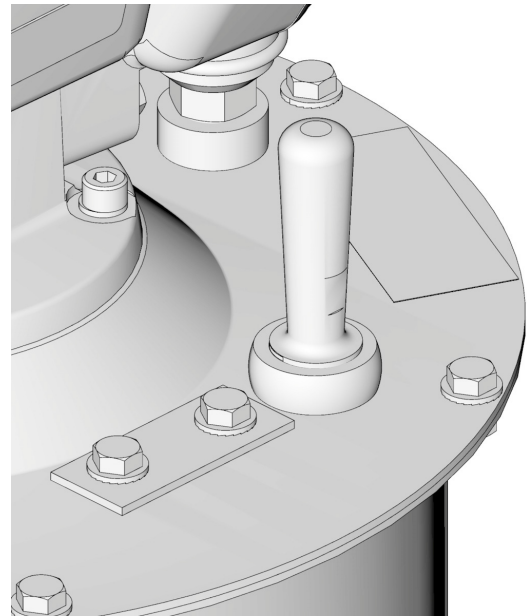


FIG. 19

3. To determine the level of the fluid remaining in the reservoir, loosen and remove dip stick from reservoir cover.

Low Level Indicator Technical Data

Low level sensor switch	Normally open sensor switch, closes upon low level
Operating temperature range	-50°F to 150°F (-45°C - 65°C)
Electrical Ratings	
Switching Power	10 Watt Max.
Switching Current	0.4A-Max.
Switching Voltage	5 - 32 VDC
Contact Resistance	0.150 Initial Ohms - Max.
Wetted Parts	
Cable	Nylon coated stainless steel
Crimp Tab	Stainless steel

Dip Stick Technical Data

Wetted Parts	Zinc plated steel
--------------	-------------------

Graco Information

For the latest information about Graco products, visit www.graco.com.

TO PLACE AN ORDER, contact your Graco distributor or call to identify the nearest distributor.

Phone: 612-623-6928 or **Toll Free:** 1-800-533-9655, **Fax:** 612-378-3590

*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

For patent information, see www.graco.com/patents.

Original instructions. This manual contains English. MM 332515

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA

Copyright 2013, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com

August 2013